

4µm FILTER



Smart Filtration Solutions **Ultra High Efficiency Filters** are designed with Donaldson's proprietary synthetic media to remove 99.95% of abrasive particulates in a single pass. All our filters are equipped with Viton® seals to have optimum compatibility with various fuels & oils.

4µm (c) @ 99.95% Efficiency (per ISO 16889)


D.E.R.T

Target Cleanliness: 14/13/11 (per ISO 4406:99)

Max Working Pressure: 350PSI / 24.1bar (per NFPA/t3.10.17)
 Rated Static Burst: 800PSI / 55.2bar (per NFPA/t3.10.17)
 Max Flow Range: 65 gpm / 246 lpm
 Operating Temperature: -40°F to 190°F / -40°C to 88°C

Outer Diameter: 4.60 Inches (117 MM)
 Thread Size: 1 3/4-12
 Length: 14.24 Inches (362 MM)
 Country of Origin: CA (Canada)
 Gross Weight in Kilograms: 2.35

ISO=International Standards Organisation
 NFPA = National Fluid Power Association

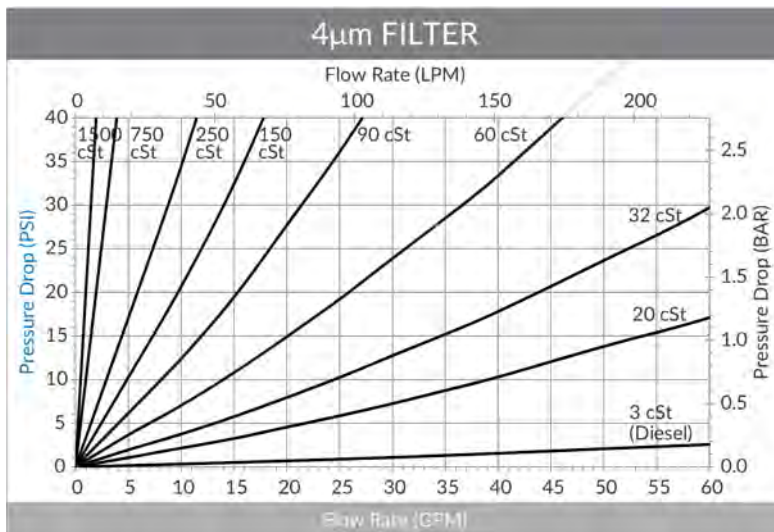

Smart Filtration Solutions L.L.C.
 P.O.Box 430479 Dubai, UAE
 Phone: +971 4 3201744
 Fax: +971 4 3204469
 info@smart-filtration.com
www.smart-filtration.com

SMART FILTRE VE END.MAK.
SIS.ITH.IHR.SAN.TIC.LTD.STI
 Uygur İş Merkezi, No:102,
 Beşiktaş, 34340, İstanbul, Turkey
 tel +90 212 337 36 18
 fax +90 212 337 36 10



ENHANCED CLEANLINESS - OPTIMUM PERFORMANCE