

# PRODUCT DATA SHEET

# 7µm FILTER



Smart Filtration Solutions **Ultra High Efficiency Filters** are designed with Donaldson's proprietary synthetic media to remove 99.95% of abrasive particulates in a single pass. All our filters are equipped with Viton® seals to have optimum compatibility with various fuels & oils.


7µm (c) @ 99.95% Efficiency (per ISO 16889)

Target Cleanliness: 16/14/11 (per ISO 4406:99)

Max Working Pressure: 350PSI / 24.1bar (per NFPA/t3.10.17)  
Rated Static Burst: 800PSI / 55.2bar (per NFPA/t3.10.17)  
Max Flow Range: 65 gpm / 246 lpm  
Operating Temperature: -40°F to 190°F / -40°C to 88°C

Outer Diameter: 4.60 Inches (117 MM)  
Thread Size: 1 3/4-12  
Length: 14.24 Inches (362 MM)  
Country of Origin: CA (Canada)  
Gross Weight in Kilograms: 2.35

ISO=International Standards Organisation  
NFPA = National Fluid Power Association

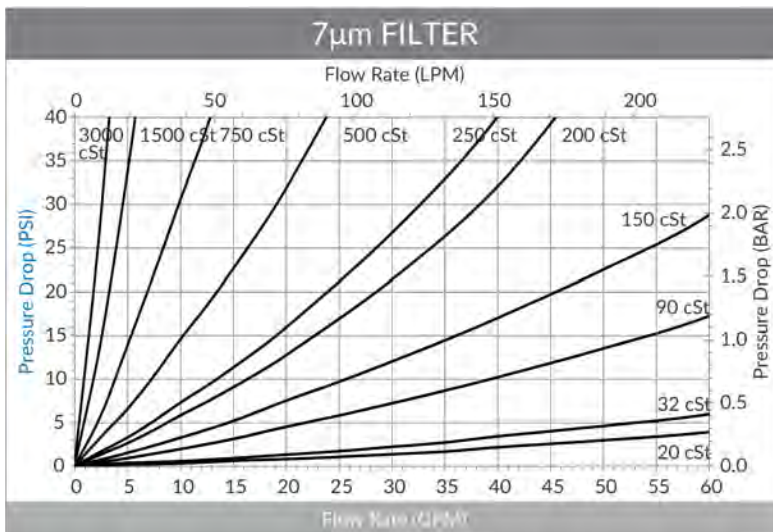

Smart Filtration Solutions L.L.C.  
P.O.Box 430479 Dubai, UAE  
Phone: +971 4 3201744  
Fax: +971 4 3204469  
info@smart-filtration.com  
[www.smart-filtration.com](http://www.smart-filtration.com)

SMART FILTRE VE END.MAK.  
SIS.ITH.IHR.SAN.TIC.LTD.STI  
Uygur İş Merkezi, No:102,  
Beşiktaş, 34340, İstanbul, Turkey  
tel +90 212 337 36 18  
fax +90 212 337 36 10



ENHANCED CLEANLINESS - OPTIMUM PERFORMANCE