

# PRODUCT DATA SHEET

# WATER ABSORBING FILTER



Smart Filtration Solutions **Ultra High Efficiency Filters** are designed with Donaldson's proprietary synthetic media to remove 99.95% of abrasive particulates in a single pass. All our filters are equipped with Viton® seals to have optimum compatibility with various fuels & oils.


## WATER ABSORBING FILTER

Contains expanding media for water detection

Max Working Pressure: 350PSI / 24.1bar (per NFPA/t3.10.17)  
 Rated Static Burst: 800PSI / 55.2bar (per NFPA/t3.10.17)  
 Max Flow Range: 65 gpm / 246 lpm  
 Operating Temperature: -40°F to 190°F / -40°C to 88°C

Outer Diameter: 4.60 Inches (117 MM)  
 Thread Size: 1 3/4-12  
 Length: 14.24 Inches (362 MM)  
 Country of Origin: US (USA)  
 Gross Weight in Kilograms: 2.30

ISO=International Standards Organisation  
 NFPA = National Fluid Power Association

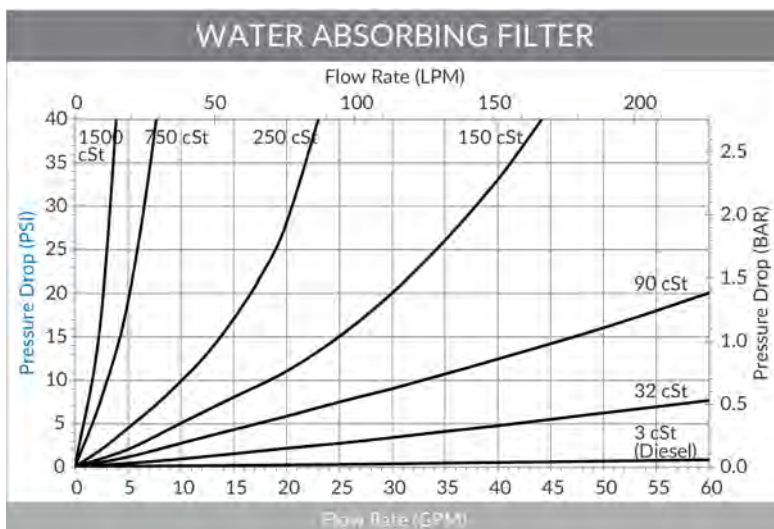

**Smart Filtration Solutions L.L.C.**  
 P.O.Box 430479 Dubai, UAE  
 Phone: +971 4 3201744  
 Fax: +971 4 3204469  
 info@smart-filtration.com  
[www.smart-filtration.com](http://www.smart-filtration.com)

**SMART FILTRE VE END.MAK.**  
**SIS.ITH.IHR.SAN.TIC.LTD.STI**  
 Uygur İş Merkezi, No:102,  
 Beşiktaş, 34340, İstanbul, Turkey  
 tel +90 212 337 36 18  
 fax +90 212 337 36 10



ENHANCED CLEANLINESS - OPTIMUM PERFORMANCE